


PHYROS REPAIR

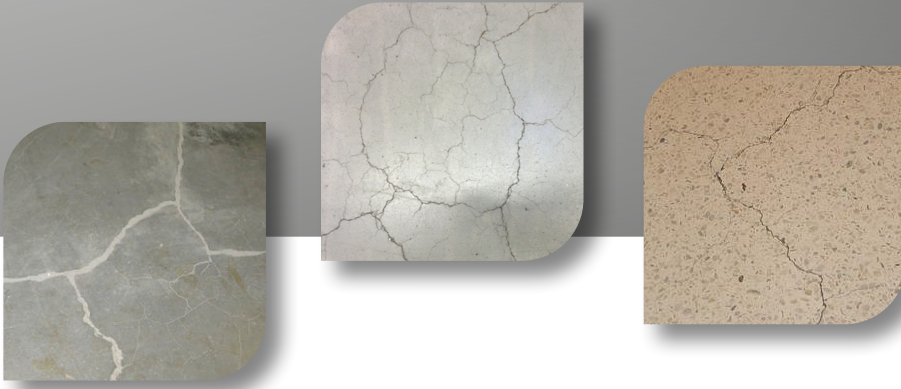

PLASTIC BONDED FILLING COMPOUND

Over time, floors exposed to high stresses develop cracks which can grow very quickly into large craters. To reduce this type of damage, we recommend our special plastic bonded filling compound.

APPLICATION FIELDS

- Industrial floors (made of concrete, screed, designer screed, terrazzo)
- Natural stone floors (marble, granite)
- Synthetically modified cement floors

ADVANTAGES

- Rapid working into surface
- Hardening starts after approx. 10 - 15 min
- Can be mixed with surface colour
- Also suitable for large cracks and holes
- Frost-proof after hardening

ORDER INFORMATION | CONTACT

VISAATEC GMBH
Vor den Birken 28 | 51674 Wiehl-Marienhagen | Germany
F 0049 2261 305060-0 | M info@visaatec.com

VISAATEC.COM